

# TKM "UNIVERSAL" ONE PIPE LATERAL

M. 2002

**Model:** One pipe valve, 4 ways with manual adjustment.

**Characteristics:** mixer valve with pre-adjustment from 0 to 100% of the water flow volume to the radiator. When the valve is in closed position it is possible to dismantle the radiator without draining the circuit.

**Material:** brass drop forging, following the regulation of DIN 17.613


**Surface:** nickel-plated.

**Watertightness:** Equipped by O-ring seals and teflon cylinder seal.

**Pressure tested :** 9 Kg/cm<sup>2</sup>

**Handwheel:** Makralon.

**Connections:** compression unions with annealed bi-cones or elastic rubbed bi-cones.

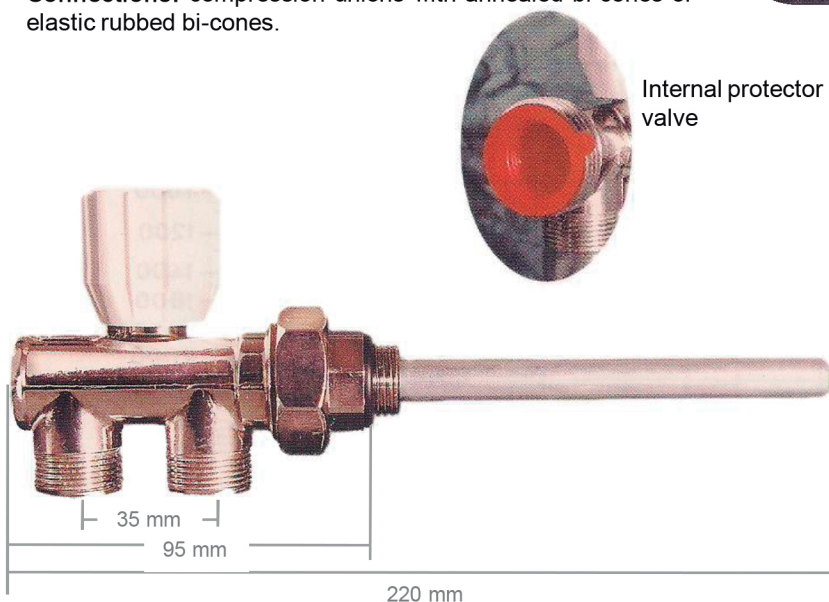

Internal protector valve





O-ring seals leak-proof between the valve and the injector



O-ring seals leak-proof to the radiator.

## Accessories:

different piping connections

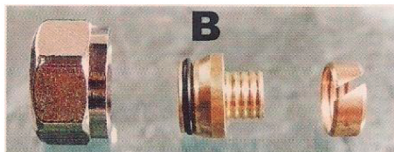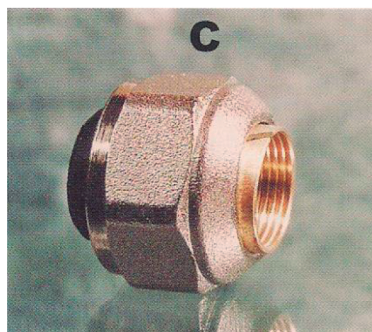


## Adjustment codification values:



|     |      |                         |
|-----|------|-------------------------|
| A=  | 20%  | circuit vol. water flow |
| B=  | 35%  | " "                     |
| CD= | 50%  | " "                     |
| E=  | 75%  | " "                     |
| F=  | 90%  | " "                     |
| G=  | 100% | " "                     |

**POLYVENTIONS (España), S.A.**

 C/ Verge de Núria, 21-E  
Polígono Industrial "Can Calderón"  
08830 Sant Boi de Llobregat  
Barcelona

 [www.polyventions.es](http://www.polyventions.es)



Office: +34 93 630 91 02  
Factory: +34 93 630 90 39



+34 93 630 42 52



[administracion@polyventions.es](mailto:administracion@polyventions.es)