




Model:

EURO.B – Two pipe valve, thermostatic or manual with thermostatic element Oventrop.

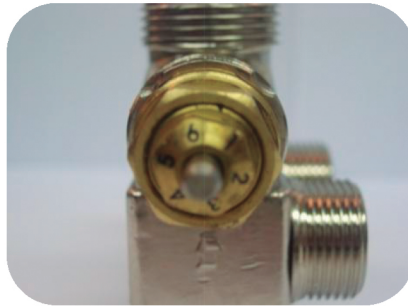

Characteristics:

Two pipe valve with volume water flow regulation to the radiator and a lock shield valve incorporated, enabling to dismantle without draining the installation.



Advantages:

With the same valve the installation could be in square position (wall) or vertical (floor).

Material: Brass drop forging, following the regulation of UNE-EN 12165.

Surface: Nickel-plated

Pressure tested: 8 Kg/cm²

Connections: For copper pipes, polyethylene, or multi-layer in different diameters.

Handwheel: Makralon

Watertightness: Rubber band between the kit and the radiator or adaptor.

POLYVENTIONS (España), S.A.



C/ Verge de Núria, 21-E
Polígono Industrial "Can Calderón"
08830 Sant Boi de Llobregat
Barcelona



www.polyventions.es



Office: +34 93 630 91 02
Factory: +34 93 630 90 39



+34 93 630 42 52



administracion@polyventions.es